


SMD Crystal Unit

FCX-07/07L

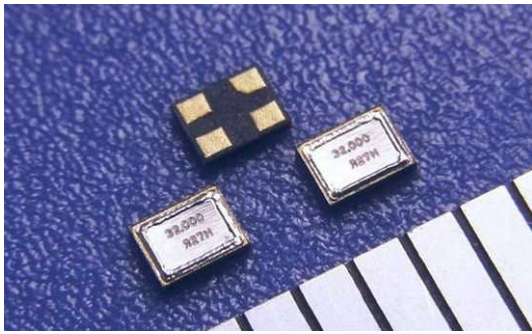


FCX-07: Standard type
FCX-07L: Low-profile type

◆ FEATURES

- 1612 size AT-cut crystal unit / frequency range 24 ~ 80 MHz.
- 1.6 × 1.2 × 0.45 mm Max./ 3.3 mg (FCX-07).
- 1.6 × 1.2 × **0.33** mm Max./ **2.5** mg (FCX-07L).
- Frequency tolerance ±7 ppm available.
- Automotive operating temperature range -40 ~ +125°C available.
- Ceramic with metal lid sealed by patented Electron-Beam-Soldering.

◆ APPLICATIONS

- Smartphones, wireless-modules, wearable devices, in-vehicle units.



◆ STANDARD SPECIFICATIONS / ORDERING INFORMATION

Ordering Number (Sample): **C7L** — **37400** — **060** — **C Q3** — **060** — **H W ##**
 (1) (2) (3) (4) (5) (6) (7) (8) (9)

(1) Type	
FCX-07	C7A
FCX-07L	C7L

(2) Nominal Frequency	
24.000 ~ 80.000 MHz	e.g. 37.400 MHz = 37400

(3) Load Capacitance	
5.0, 6.0, 7.0 pF*1	e.g. 6.0 pF = 060

*1 Other capacitances available

(4) Frequency Tolerance @ 25°C	
±7 ppm	A
±10 ppm	B
±15 ppm	C
±20 ppm	D
±30 ppm	E
±50 ppm	F
Other	N

(5) Operating Temperature	Frequency Temperature Characteristics (with reference to 25°C)				
	±10 ppm	±15 ppm	±20 ppm	±30 ppm	±50 ppm
-20 ~ +70°C	P1	P2	P3	P4	P5
-30 ~ +85°C	Q1	Q2	Q3	Q4	Q5
-40 ~ +85°C	-	R2	R3	R4	R5
-40 ~ +105°C	-	-	-	S4	S5
-40 ~ +125°C	-	-	-	-	T5
Other	NN				

(6) Equivalent Series Resistance	
24 ~ 26 MHz: 150Ω Max.	150
26 ~ 32 MHz: 100Ω Max.	100
32 ~ 50 MHz: 60Ω Max.	060
50 ~ 80MHz: 50Ω Max.	050
Other	NNN

(7) Storage Temperature*2	
-40 ~ +85°C	G
-40 ~ +105°C	H
-55 ~ +125°C	J
Other	N


*2 Not applicable to packing materials

(8) Tape & Reel (φ180 mm)	
5000 pcs/reel	W
3000 pcs/reel	X
Other	N

(9) RIVER Use Only (As needed)
Drive Level
100 μW Max.

- The codes for the Ordering Number are indicated in blue, and the specifications are described in black.
- Not all combinations of options are available as standard.
- AEC-Q200 compliant spec available upon request.
- For specifications that include "Overall Frequency-Tolerance", please select "N" for the (4) Frequency Tolerance and let us know your specific requirements.
- For specifications other than those above, please contact our sales / website and let us know your specific requirements.

◆ OUTLINE DIMENSIONS

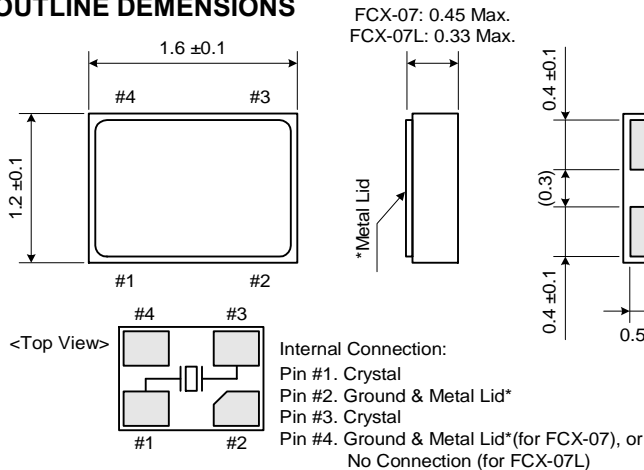

◆ LAND PATTERN

Unit: mm

