



XRCJH26M000F1QC1P0

目前生产

RoHS

REACH

外观&形状

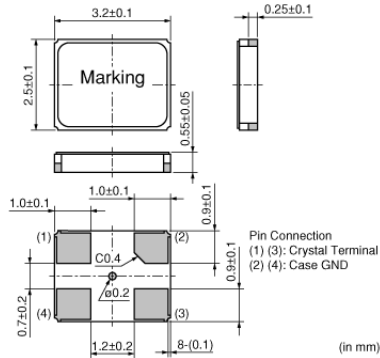

特点

Standard package size (3225) product with unique metal sealing technology.
This product realizes an excellent frequency stability over temperature.
They are suitable for various types of digital communication equipment.

用途

其他用途	工业级
------	-----

包装信息

包装	规格	最小订购单位
P0	180mm塑料编带	3000

XRCJH26M000F1QC1P0

规格

型号	TAS-3225J
频率	26.0000MHz
频率公差	±10ppm max. (25±3°C)
工作温度范围	-30°C to 85°C
频率温度特性	±15ppm max.
频率老化	±1ppm max./year(±3ppm max./5years)
清洗	Not available
负载电容量	8pF
等效串联电阻(max.)	60Ω
驱动电平(max.)	60μW
形状	SMD